


■ Technical data


Models		SML-	140	280
Displacement	60Hz	ℓ/min	140	280
	50Hz		120	235
Ultimate Pressure		mmHg	660	660
		bar	1.0	1.0
Motor Version	3Phase	V	-	220/380
	1Phase		110/220	110/220
Motor	3Phase	kW	-	0.56
	1Phase		0.25	0.56
Motor Speed	60Hz	min ⁻¹	1,725	1,725
	50Hz		1,425	1,425
Noise		dB(A)	58	68
Operating Temp.		°C	40	40
Weight		kg	13.5	25.5

■ Performance Curve

SML-140

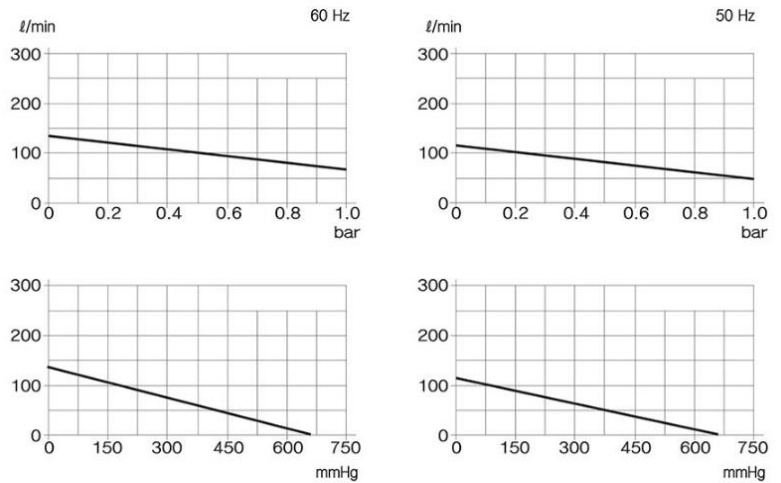


SML-280

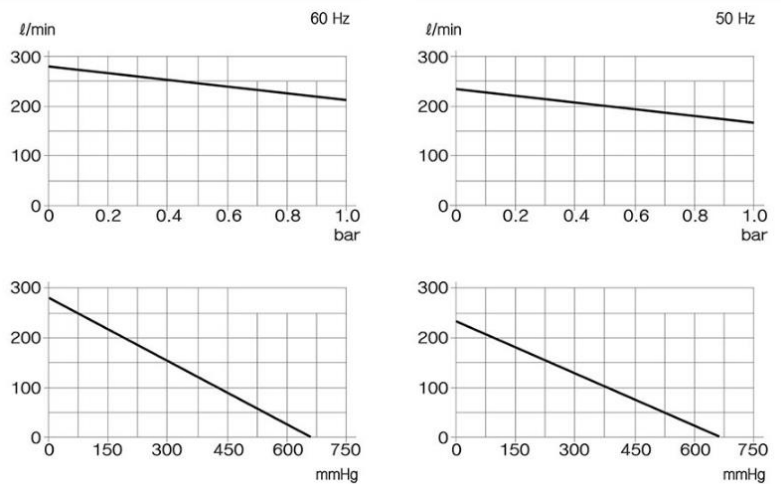


■ Dimensions

SML-140

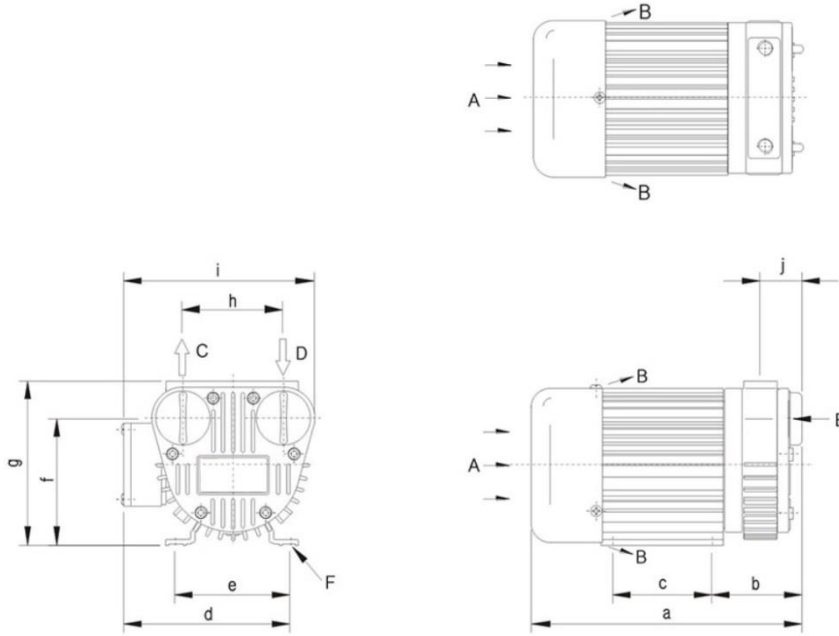

SML-280

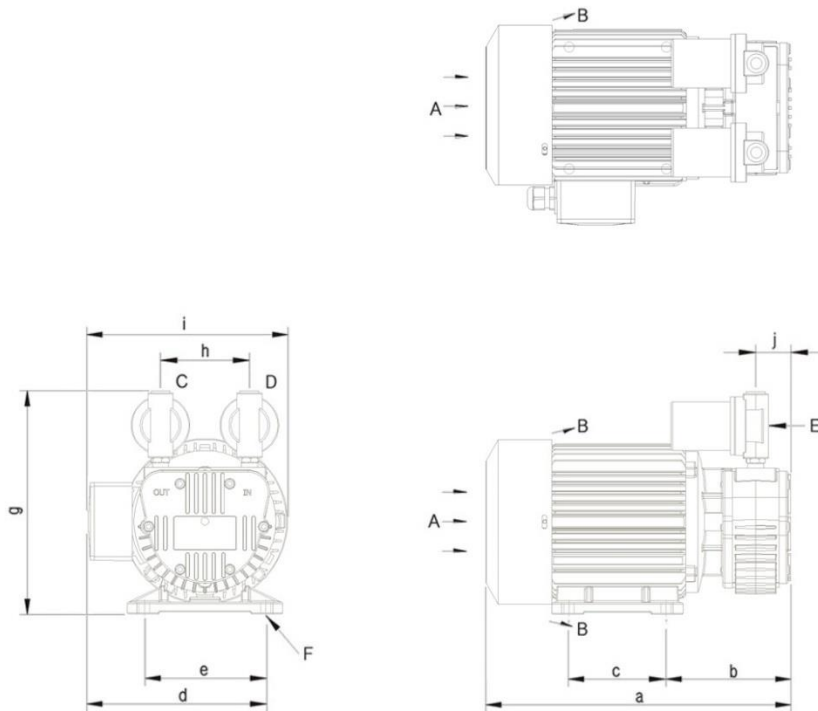

A Cooling air entry	B Cooling air exit	C Exhaust port	D Inlet flange	E Inlet & Exhaust filter	F Pump base
----------------------------	---------------------------	-----------------------	-----------------------	---------------------------------	--------------------

Models	a	b	c	d	e	f	g	h	i	j	C	D
SML-140	245	81.5	90	151	104.5	114	148	91	172.5	38	¼"	¼"
SML-280	315.5	128	100	182.5	125	-	230	91.5	207	36	⅜"	⅜"